



# CONSTRUCTION ENTRANCE FIELD GUIDE

## Purpose


This guide provides general guidance for installing and maintaining a stabilized construction entrance to prevent mud and sediment from being tracked from construction sites onto public roadways and into the stormwater system.

## Minimum Installation Requirements

- **Width:** Minimum 20 feet
- **Length:** Minimum 50 feet
- **Stone:** 2–4 inch aggregate (#2 or #3 rock typical)
- **Thickness:** Minimum 6 inches
- Geotextile filter fabric recommended beneath stone

## Maintenance

- Inspect regularly and after rain events
- Add additional rock if ruts or bare soil develop
- Remove accumulated sediment from entrance area
- Sweep or scrape mud tracked onto adjacent roads

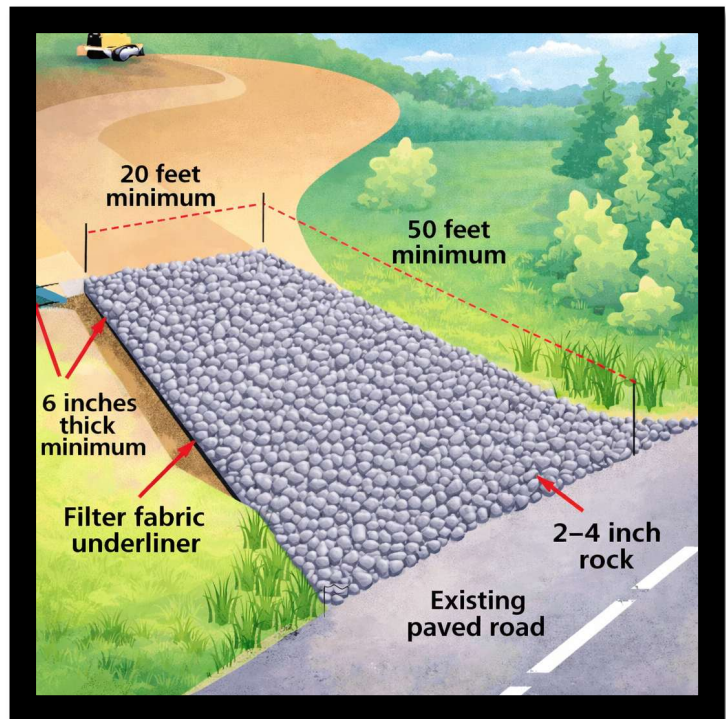

## Important

If sediment is tracked onto the roadway, it must be removed by sweeping or scraping. Sediment should never be washed into storm drains.

## Contact Information

Matthew Thomas, CFM

GIS / MS4 / Floodplain Coordinator

City of Berea

212 Chestnut Street

Berea, KY 40403

(859) 986-8528

mthomas@bereaky.gov